

THERMHEX PEI HONEYCOMB CORES

Continuing to work with lightweight materials whilst using sustainable materials is one of the major challenges today's aviation industry faces. Aerospace industry and other high end applications have been favouring non-recyclable thermoset phenolic resin based honeycombs for a long time. To provide a more sustainable alternative, we offer a high performance thermoplastic honeycomb core. This without compromising the markets needs in weight, fire-safety and performance.

The target applications for PEI honeycomb cores are mainly aircraft and railway interior components. With a need for ramp up of production volumes and increasing focus on SHE (safety,

health, environment), efficiently produced thermoplastic honeycombs made with the already proven EconCore technology offer great potential. The thermoplastic honeycomb is typically laminated with fibre-reinforced thermoplastic composites, resulting in a mono-material, thermoplastic sandwich solution.

EconCore's new patented ThemHex wavy cell wall geometry increases the cell wall buckling resistance and thus the key mechanical properties of the honeycomb core.

ADVANTAGES IN AIRCRAFT INTERIORS

HIGH WEIGHT-SPECIFIC STIFFNESS AND STRENGTH


COST REDUCTION POTENTIAL

REDUCED CO₂ FOOTPRINT

100% RECYCLABLE PEI

EXCELLENT FIRE RESISTANCE

ENABLES ADVANCED THERMOPLASTIC PROCESSING

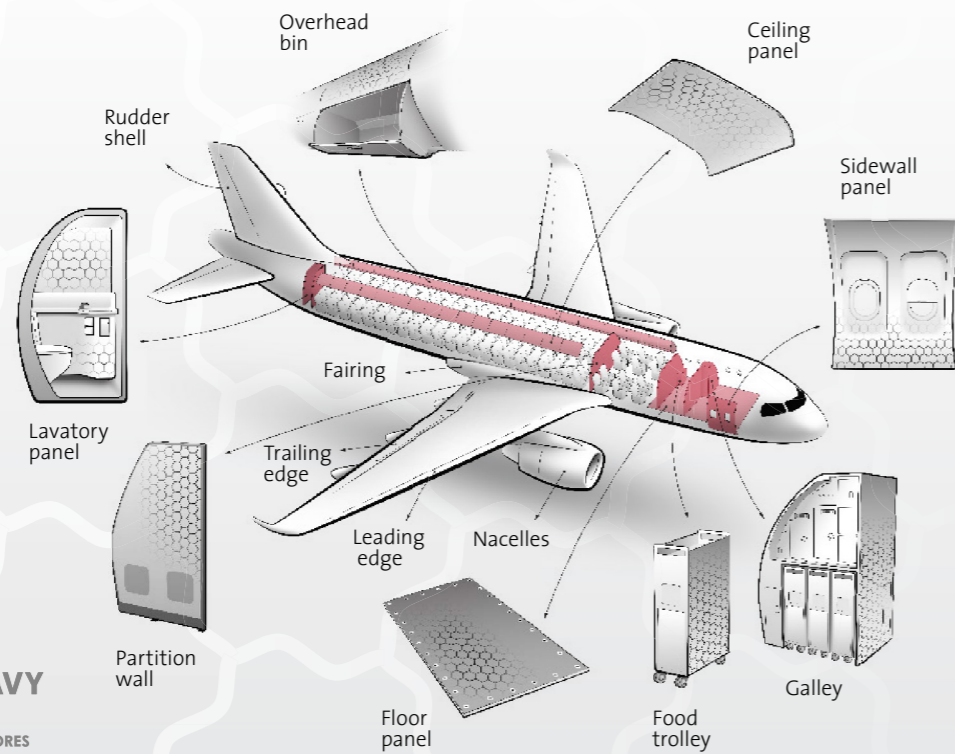

ThermHex WAVY
HIGH PERFORMANCE THERMOPLASTIC CORES

THERMHEX WABEN GMBH

Merseburger Str. 235
D-06130 Halle (Saale)
Germany

Tel.: +49 345 131627-0
Fax: +49 345 131627-19
Email: info@thermhhex.com
Web: www.thermhhex.com

ThermHex
an econcore group company



LIABILITY FOR DEFECTS

All information provided herein is based on our current knowledge and experience. Due to the high number of possible influences during processing and application, the information does not release the processor from the necessity of carrying out his own investigations and tests. Information contained herein and explanations provided by ThermHex Waben GmbH in connection with this printed matter does not represent acceptance of a guarantee. Guarantee statements require special explicit written declarations on behalf of ThermHex Waben GmbH to be effective. The constitutions stated in this datasheet determine the properties of the delivery item extensively and conclusively. Application suggestions do not establish assurance of suitability for the recommended application.

We reserve the right to adapt the product to satisfy technical progress and new developments. We would be pleased to help with any enquiries including those related to special application issues. If the application for which our products are used is subject to statutory approval, the user is responsible for the procurement of such approval. Our recommendations do not release the user from the obligation of taking the possibility of impairments to third-party rights into account and of clarifying these if necessary. Furthermore we refer to our General Terms and Conditions, especially with regard to any possible liability for defects. If you are not in possession of our General Terms and Conditions we would be pleased to supply these on request.

ThermHex
an econcore group company



MARKETS & APPLICATIONS

THERMHEX PEI HONEYCOMB CORES

THERMHEX^{WAVY} POLYETHERIMIDE HONEYCOMB CORES
THE NEW HIGH PERFORMANCE THERMOPLASTIC CORE MATERIAL


NEW PRODUCT

ThermHex WAVY
HIGH PERFORMANCE THERMOPLASTIC CORES


WWW.THERMHEX.COM

THERMHEX PEI HONEYCOMB CORES


TWPEI32 | TWPEI48 | TWPEI64 | TWPEI80 | TWPEI96

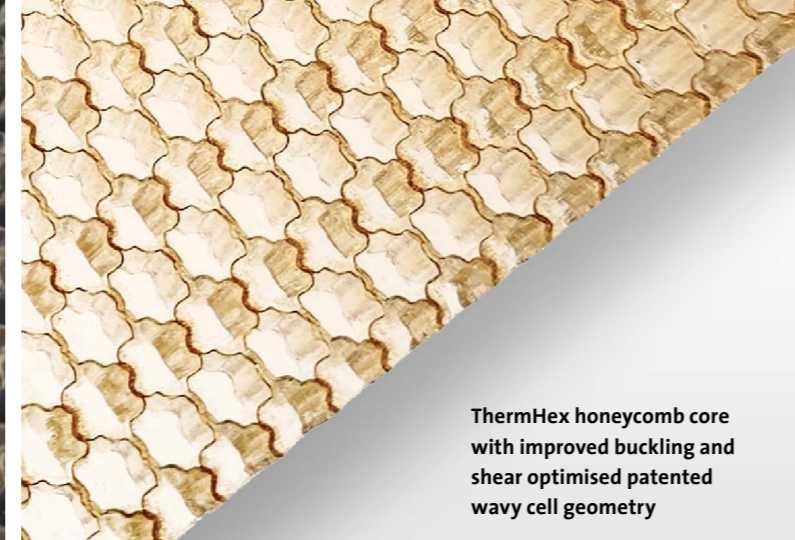

ThermHex honeycomb core with improved buckling and shear optimised patented wavy cell geometry

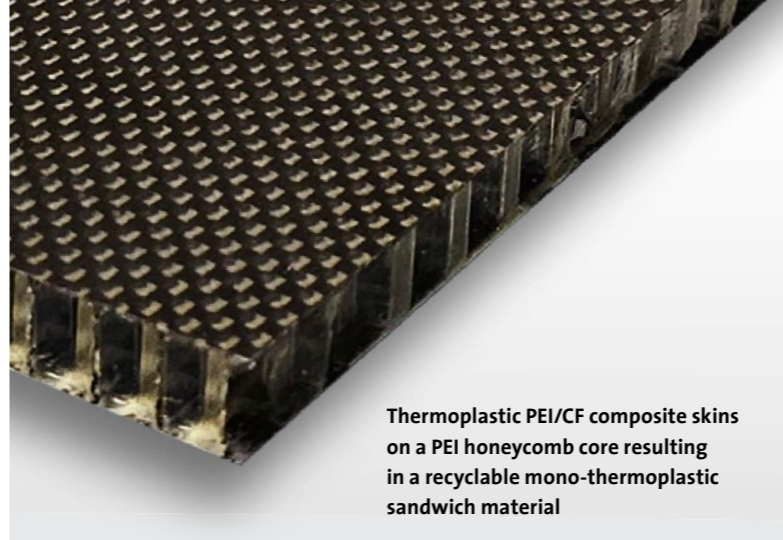

Thermoplastic PEI/CF composite skins on a PEI honeycomb core resulting in a recyclable mono-thermoplastic sandwich material

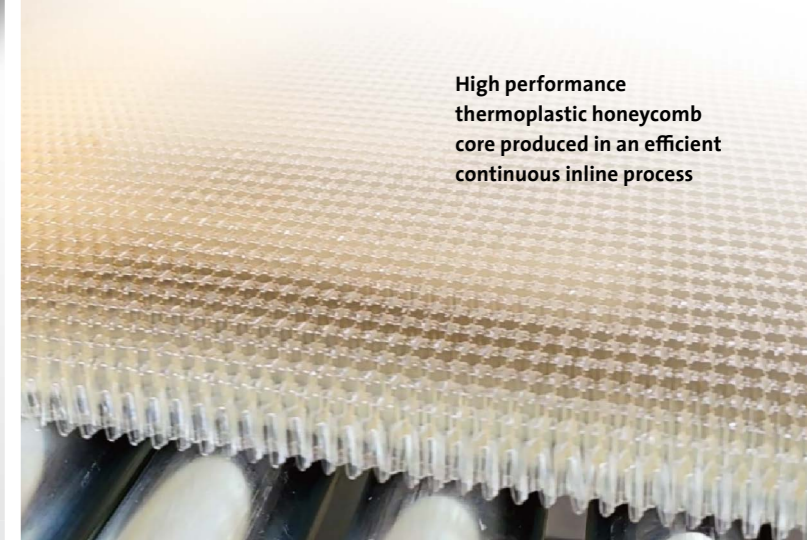


High performance thermoplastic honeycomb core produced in an efficient continuous inline process


TECHNICAL DATA

PRODUCT DESCRIPTION

	TWPEI32	TWPEI48	TWPEI64	TWPEI80	TWPEI96
Core material	Polyetherimide	Polyetherimide	Polyetherimide	Polyetherimide	Polyetherimide
Core thickness (mm) (other geometries available upon request)	7* 10 12 25,4*	7* 10 12 25,4*	7* 10 12 25,4*	7* 10 12 25,4*	7* 10 12 25,4*
Cell size (mm)	6.4	6.4	6.4	6.4	6.4
Cell wall density (kg/m³)	32	48	64	80	96
Compressive strength (Z-direction) (MPa) (ASTM C365)	0.4	1.1	2.0	2.9	3.8
Compressive modulus (Z-direction) (MPa) (ASTM C365)	20	50	65	75	85
Shear strength (CD, L) (MPa) (ASTM C273)	0.5	0.6	0.7	0.8	0.9
Shear strength (MD, W) (MPa) (ASTM C273)	0.2	0.3	0.4	0.5	0.6
Shear modulus (CD, L) (MPa) (ASTM C273)	18	22	25	28	31
Shear modulus (MD, W) (MPa) (ASTM C273)	4	9	11	13	15
Fire resistance	Fulfills all requirements of Federal Aviation Regulation (FAR 25.853)				
Standard dimensions (MD, W x CD, L) (mm)	2500 x 1200 (* 7mm and 25,4mm currently available in 400 mm width)				
Temperature range (°C)	-55 to +180				

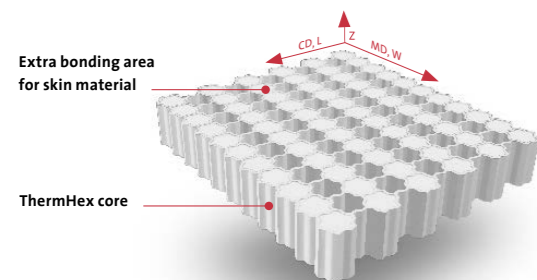


ThermHex WAVY
HIGH PERFORMANCE THERMOPLASTIC CORES



ThermHex^{WAVY} PEI is protected by Patent EP4275877 and EP1824667.

THE COMPRESSION STRENGTH OF THERMHEX^{WAVY} PEI HONEYCOMB CORES

Flatwise compression strength (bare, not stabilised) in function of honeycomb cell wall density

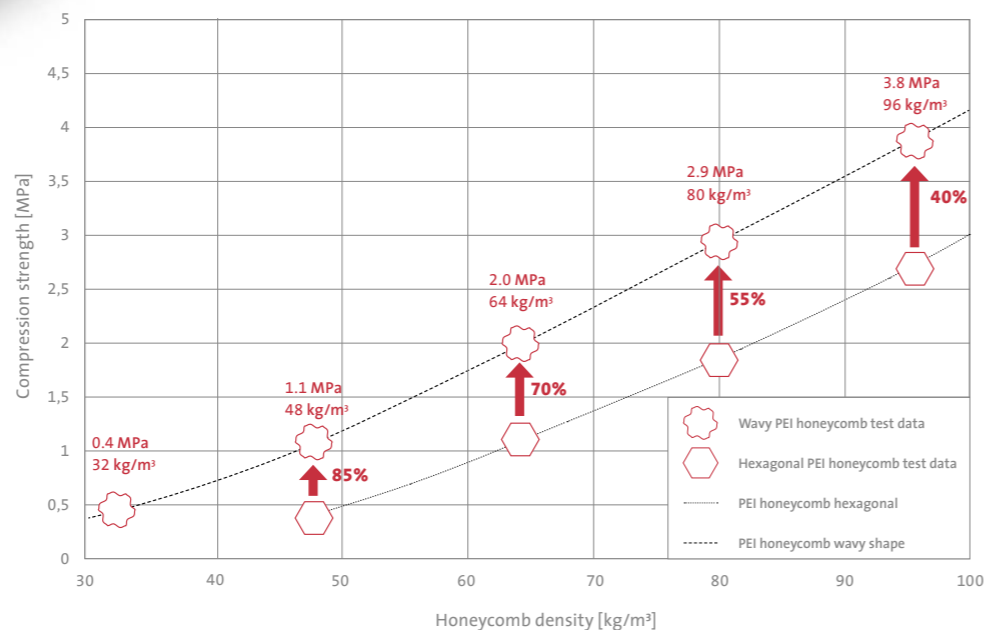

APPLICATIONS OF THERMHEX^{WAVY} PEI HONEYCOMB CORES AND PANELS

ThermHex^{WAVY} PEI honeycomb core is a continuously produced thermoplastic honeycomb core with exceptional fire resistance and temperature stability.

PROCESSING WITH THERMOPLASTIC PROCESSES

EcoBin



EcoRudder

AIRBUS

Fraunhofer IMWS

DTU




Thermoplastic PEI/CF or PEI/GF composite skins, which can be bonded by thermoplastic welding to ThermHex^{WAVY} PEI honeycombs.



Thermoforming of thermoplastic sandwich panels

PROCESSING WITH CONVENTIONAL THERMOSET PROCESSES

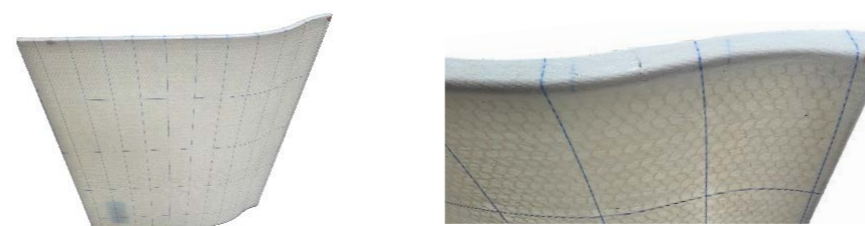

Conventional thermoset e.g. epoxy prepreg skins can be bonded to ThermHex^{WAVY} PEI honeycombs, resulting in fully phenolic resin free sandwich panels and parts.

CLEAN AVIATION

Co-funded by the European Union